



PathMinder software connections - USB/serial adapters

i Cabling for sample four lane installation

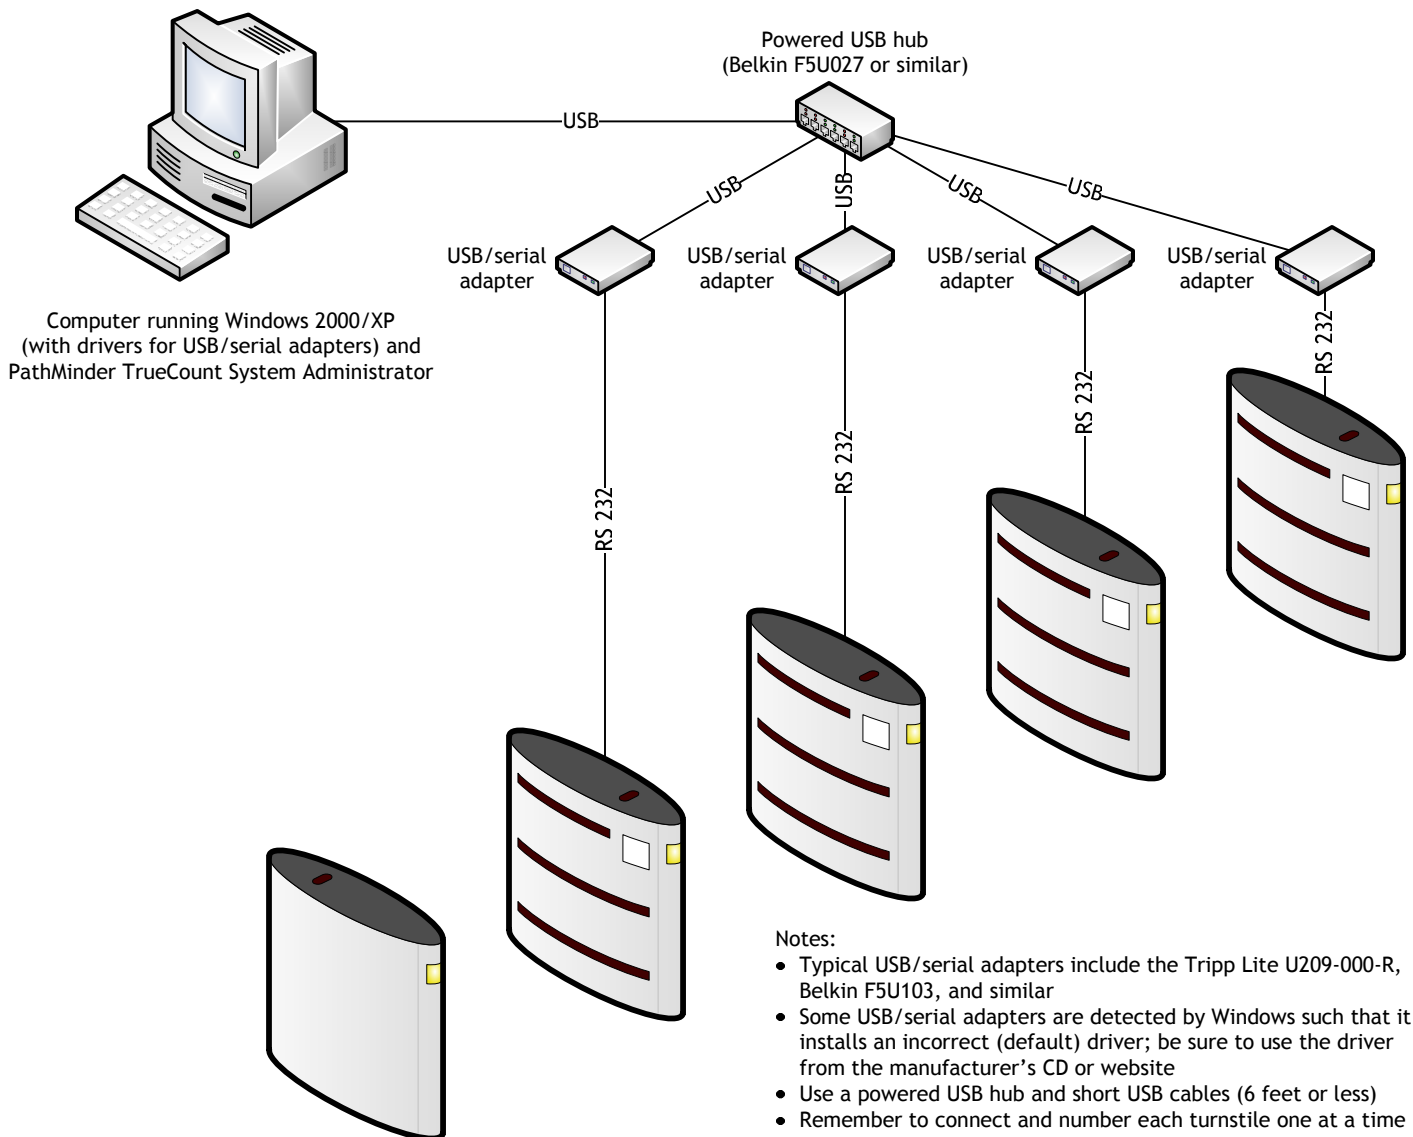

ii Connection inside the turnstile

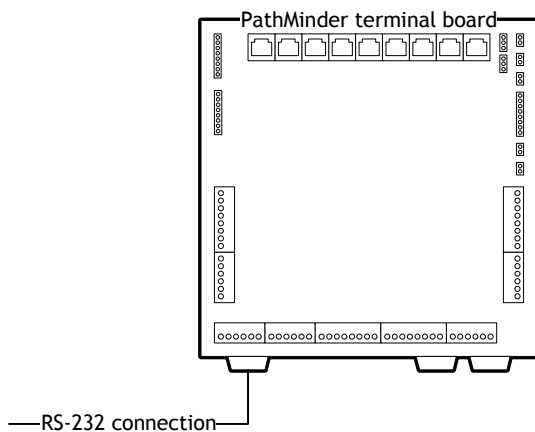

iii Pinout - null modem cable with DB9F connectors

Each lane requires a three-conductor (22ga.) cable run directly to the desktop area, terminated as shown below. These cables can not be daisy-chained. The maximum practical run for the RS-232 cable is 35 feet.

